

DATA SHEET

MODULETEK – DAC-QSFP10-QSFP10-A-M-xxAWG-aa.aaM-C0C0C

QSFP+ Active Copper Cable Assembly

DAC-QSFP10-QSFP10-A-M-xxAWG-aa.aaM-C0C0C Overview

ModuleTek's DAC-QSFP10-QSFP10-A-M-xxAWG-aa.aaM-C0C0C QSFP+ (Quad Small Form-factor Pluggable Plus) active direct-attach copper cables are suitable for very short distances and offer a highly cost-effective way to establish a 40-Gigabit link between QSFP+ ports. QSFP+ are designed for a high density cabling interconnect system capable of delivering an aggregate data bandwidth of 40Gbps. This interconnect system is fully compliant with QSFP+ MSA. The QSFP+ cables support the bandwidth transmission requirements defined by IEEE802.3ba (40Gbps).

Product Features

- Up to 40 Gb/s bi-directional data links
- Compliant with QSFP+ MSA specifications
- Fully Compliant with IEEE802.3ba and Infiniband QDR specifications
- 4 independent duplex channels operating at 10Gbps, also support for 2.5Gbps,5Gbps data rates
- All-metal housing for superior EMI performance
- Single power supply 3.3V
- low power consumption, less than 1.5W
- RoHS Compliant
- Operating temperature range: 0°C to 70°C

Applications

- 40Gigabit Ethernet
- Serial Data Transmission

Ordering Information

Part Number	Description	Gauge	Length
DAC-QSFP10-QSFP10-A-M-xxAWG-aa.aaM-C0C0C	QSFP+ 40G Active Copper Cable Assembly, aa.aa \leq 7	30AWG	\leq 7m
DAC-QSFP10-QSFP10-A-M-xxAWG-aa.aaM-C0C0C	QSFP+ 40G Active Copper Cable Assembly, 7<aa.aa \leq 10	28AWG	7m<length \leq 10m
<p>Note:</p> <ol style="list-style-type: none"> 1. "aa.aa" indicates the cable length in meters. 2. The wire diameter of the products in the above list is the default value under different lengths. We can also provide other wire products to customers with special requirements. 			
<p>For More Information: ModuleTek Limited Unit 4A, B Building, Shenfubao S&T Industrial Park, No. 3 Huang Huai Road, Futian Free Trade Zone, Shenzhen, China. 518038. Email: sales@moduletek.com</p>			

General Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Bit Error Rate	BER			10^{-12}		
Operating Temperature	T _{OP}	0		70	°C	1
Storage Temperature	T _{STO}	-40		85	°C	2
Input Voltage	V _{CC}	3.14	3.3	3.46	V	3
Maximum Voltage	V _{MAX}	-0.5		4	V	3


Notes:

1. Case temperature
2. Ambient temperature
3. For electrical power interface

Cable Mechanical Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Wire Gauge		30AWG		28AWG	AWG	
Cable Impedance	Z	95	100	105	Ohm	

Block Diagram of Transceiver

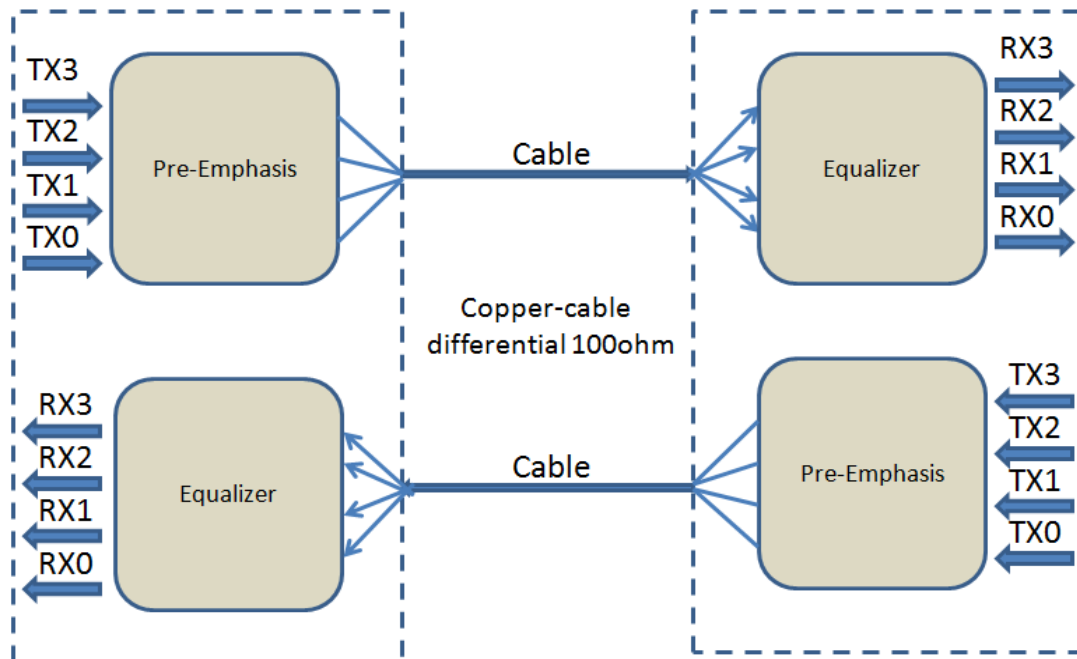


The transmitter side accepts electrical input signals. All input data signals are differential LVPECL or CML logic and they are internally terminated. The parallel input electrical signal first is processed via the Pre-Emphasis.

At the receiver side, the parallel electrical signals is recovered via Equalizer. The outputs electrical signals of receive side are voltage compatible with Current Mode Logic (CML) levels. All data signals are differential and support a data rate up to 10Gbps per channel.

All transmitter signals and receiver signals are AC coupled internally on both modules ends.


Active cable assembly has built-in MCU, offer a number of additional host-management capabilities. I2C (Inter-IC bus protocol) interface and on-board EEPROM features enable the host to detect or configure specific performance characteristics.

Dimensions

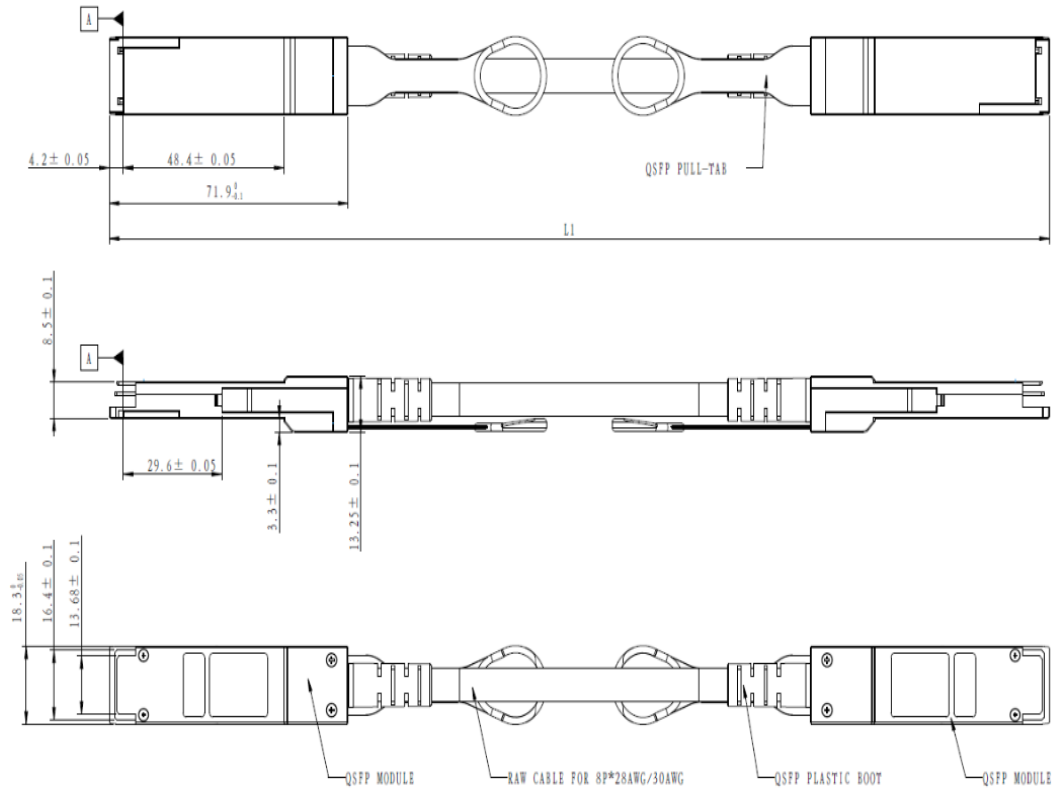


ALL DIMENSIONS ARE ± 0.2 mm UNLESS OTHERWISE SPECIFIED
UNIT: mm



Electrical Pad Layout

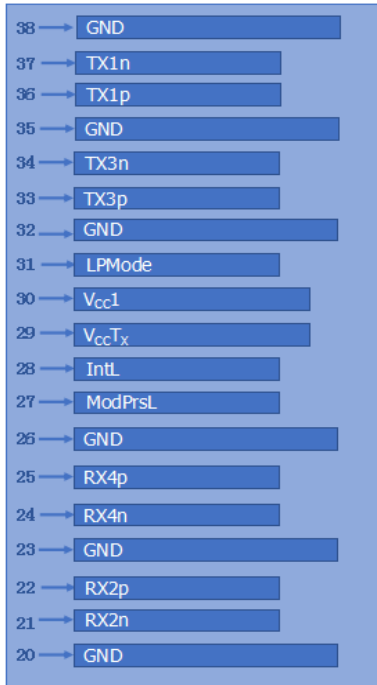

Top Board

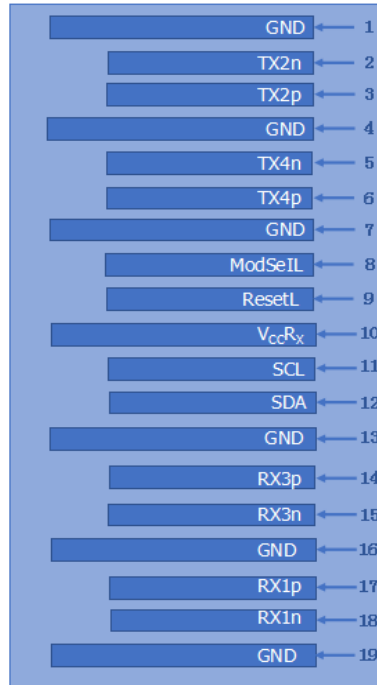

Bottom Board

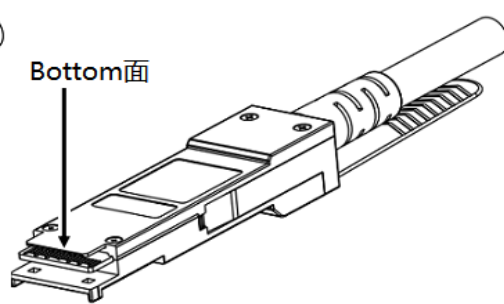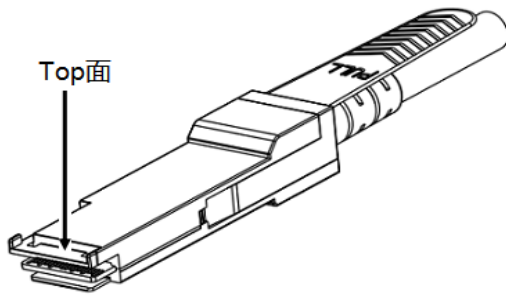

Pin Assignment

PIN #	Symbol	Description	Remarks
1	GND	Ground	
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	
8	ModSelL	Module Select	
9	ResetL	Module Reset	
10	V _{cc} R _X	+3.3V Power Supply Receiver	
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	
20	GND	Ground	
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	
27	ModPrsL	Module Present	
28	IntL	Interrupt	
29	V _{cc} T _X	+3.3V Power Supply transmitter	
30	V _{cc} 1	+3.3V Power Supply	
31	LPMODE	Low Power Mode	
32	GND	Ground	
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	

35	GND	Ground	
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Input	
38	GND	Ground	

References

1. IEEE standard 802.3ba. IEEE Standard Department.
2. QSFP+ 10Gbps 4X PLUGGABLE TRANSCEIVER – SFF-8436.