

## DATA SHEET

### MODULETEK: SFP-10G-CWDM-DML-xxxx-10KM-x-G13

10Gb/s SFP+ CWDM 10km Transceiver

#### Overview

ModuleTek's SFP-10G-CWDM-DML-xxxx-10KM-x-G13 SFP+ CWDM 10km optical transceivers are based on 10G Ethernet IEEE 802.3ae standard and SFF-8431 standard, and provide a quick and reliable interface for the 10G Ethernet application. The digital diagnostics functions are available via the 2-wire serial bus specified in the SFF-8472.

#### Product Features

- Up to 10.7 Gb/s bi-directional data links
- Compliant with IEEE 802.3ae 10GBASE-LR/LW
- Compliant with 10GFC
- Compliant with SFF-8431
- Hot-pluggable SFP+ footprint
- CWDM DFB laser transmitter
- Duplex LC connector
- Built-in digital diagnostic functions
- Up to 10km on SMF
- Single power supply 3.3V
- RoHS Compliant
- Operating temperature range (Case Temperature): Commercial Level: 0°C to 70°C  
Extended Level: -20°C to 85°C



#### Applications

- 10GBASE-LR/LW Ethernet
- 10GFC
- 10km 10G CWDM Network

## Ordering Information

Part Number	Product ID	Description	Color on Clasp
SFP-10G-CWDM-DML-1270-10KM-C-G13	M489214W1270	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1270nm, Single Mode Fiber 10km, Commercial Temperature	Aqua blue
SFP-10G-CWDM-DML-1270-10KM-E-G13	M489221W1270	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1270nm, Single Mode Fiber 10km, Extended Temperature	Aqua blue
SFP-10G-CWDM-DML-1290-10KM-C-G13	M489214W1290	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1290nm, Single Mode Fiber 10km, Commercial Temperature	Peach blossom
SFP-10G-CWDM-DML-1290-10KM-E-G13	M489221W1290	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1290nm, Single Mode Fiber 10km, Extended Temperature	Peach blossom
SFP-10G-CWDM-DML-1310-10KM-C-G13	M489214W1310	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1310nm, Single Mode Fiber 10km, Commercial Temperature	Olive
SFP-10G-CWDM-DML-1310-10KM-E-G13	M489221W1310	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1310nm, Single Mode Fiber 10km, Extended Temperature	Olive
SFP-10G-CWDM-DML-1330-10KM-C-G13	M489214W1330	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1330nm, Single Mode Fiber 10km, Commercial Temperature	Yellow green
SFP-10G-CWDM-DML-1330-10KM-E-G13	M489221W1330	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1330nm, Single Mode Fiber 10km, Extended Temperature	Yellow green
SFP-10G-CWDM-DML-1350-10KM-C-G13	M489214W1350	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1350nm, Single Mode Fiber 10km, Commercial Temperature	Sky blue
SFP-10G-CWDM-DML-1350-10KM-E-G13	M489221W1350	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1350nm, Single Mode Fiber 10km, Extended Temperature	Sky blue
SFP-10G-CWDM-DML-1370-10KM-C-G13	M489214W1370	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1370nm, Single Mode Fiber 10km, Commercial Temperature	Pink
SFP-10G-CWDM-DML-1370-10KM-E-G13	M489221W1370	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1370nm, Single Mode Fiber 10km, Extended Temperature	Pink
SFP-10G-CWDM-DML-1390-10KM-C-G13	M489214W1390	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1390nm, Single Mode Fiber 10km, Commercial Temperature	White
SFP-10G-CWDM-DML-1390-10KM-E-G13	M489221W1390	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1390nm, Single Mode Fiber 10km, Extended Temperature	White

SFP-10G-CWDM-DML-1410-10KM-C-G13	M489214W1410	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1410nm, Single Mode Fiber 10km, Commercial Temperature	Black
SFP-10G-CWDM-DML-1410-10KM-E-G13	M489221W1410	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1410nm, Single Mode Fiber 10km, Extended Temperature	Black
SFP-10G-CWDM-DML-1430-10KM-C-G13	M489214W1430	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1430nm, Single Mode Fiber 10km, Commercial Temperature	Beige
SFP-10G-CWDM-DML-1430-10KM-E-G13	M489221W1430	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1430nm, Single Mode Fiber 10km, Extended Temperature	Beige
SFP-10G-CWDM-DML-1450-10KM-C-G13	M489214W1450	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1450nm, Single Mode Fiber 10km, Commercial Temperature	Ocean blue
SFP-10G-CWDM-DML-1450-10KM-E-G13	M489221W1450	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1450nm, Single Mode Fiber 10km, Extended Temperature	Ocean blue
SFP-10G-CWDM-DML-1470-10KM-C-G13	M489214W1470	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1470nm, Single Mode Fiber 10km, Commercial Temperature	Gray
SFP-10G-CWDM-DML-1470-10KM-E-G13	M489221W1470	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1470nm, Single Mode Fiber 10km, Extended Temperature	Gray
SFP-10G-CWDM-DML-1490-10KM-C-G13	M489214W1490	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1490nm, Single Mode Fiber 10km, Commercial Temperature	Violet
SFP-10G-CWDM-DML-1490-10KM-E-G13	M489221W1490	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1490nm, Single Mode Fiber 10km, Extended Temperature	Violet
SFP-10G-CWDM-DML-1510-10KM-C-G13	M489214W1510	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1510nm, Single Mode Fiber 10km, Commercial Temperature	Blue
SFP-10G-CWDM-DML-1510-10KM-E-G13	M489221W1510	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1510nm, Single Mode Fiber 10km, Extended Temperature	Blue
SFP-10G-CWDM-DML-1530-10KM-C-G13	M489214W1530	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1530nm, Single Mode Fiber 10km, Commercial Temperature	Green
SFP-10G-CWDM-DML-1530-10KM-E-G13	M489221W1530	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1530nm, Single Mode Fiber 10km, Extended Temperature	Green
SFP-10G-CWDM-DML-1550-10KM-C-G13	M489214W1550	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1550nm, Single Mode Fiber 10km, Commercial Temperature	Yellow

SFP-10G-CWDM-DML-1550-10KM-E-G13	M489221W1550	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1550nm, Single Mode Fiber 10km, Extended Temperature	Yellow
SFP-10G-CWDM-DML-1570-10KM-C-G13	M489214W1570	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1570nm, Single Mode Fiber 10km, Commercial Temperature	Orange
SFP-10G-CWDM-DML-1570-10KM-E-G13	M489221W1570	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1570nm, Single Mode Fiber 10km, Extended Temperature	Orange
SFP-10G-CWDM-DML-1590-10KM-C-G13	M489214W1590	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1590nm, Single Mode Fiber 10km, Commercial Temperature	Red
SFP-10G-CWDM-DML-1590-10KM-E-G13	M489221W1590	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1590nm, Single Mode Fiber 10km, Extended Temperature	Red
SFP-10G-CWDM-DML-1610-10KM-C-G13	M489214W1610	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1610nm, Single Mode Fiber 10km, Commercial Temperature	Brown
SFP-10G-CWDM-DML-1610-10KM-E-G13	M489221W1610	10 Gigabit CWDM SFP+ Transceiver, LC Connectors, 1610nm, Single Mode Fiber 10km, Extended Temperature	Brown
Notes: 1.Product ID is the abbreviated order number of the standard model of our products			
<b>For More Information:</b> ModuleTek Limited Web: <a href="http://www.moduletek.com">www.moduletek.com</a> Email: <a href="mailto:sales@moduletek.com">sales@moduletek.com</a>			

## General Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Data Rate	DR		10.3125		Gb/s	1
Bit Error Rate	BER			$10^{-12}$		
Operating Temperature	$T_C$	0		70	°C	2
		-20		85	°C	2
Storage Temperature	$T_{STO}$	-40		90	°C	3
Supply Current (Commercial Temperature)	$I_{CC}$		200	310	mA	4
Supply Current (Extended Temperature)	$I_{CC}$		200	350	mA	4
Input Voltage	$V_{CC}$	3.14	3.3	3.46	V	
Power Dissipation (Commercial Temperature)	$P_C$		0.65	1.0	W	
Power Dissipation (Extended Temperature)	$P_E$		0.65	1.2	W	
Maximum Voltage	$V_{MAX}$	-0.5		4	V	4

### Notes:

1. IEEE 802.3ae
2. Case temperature
3. Ambient temperature
4. For electrical power interface

## Link Distances

Data Rate	Fiber Type	Distance Range (km)
10.3125 Gb/s	9/125um SMF	10

## Optical – Characteristics – Transmitter

$V_{CC}=3.14V$  to  $3.46V$ ,  $T_C$

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Output Optical Power	$P_{TX}$	2		7	dBm	1
Optical Center Wavelength	$\lambda_C$	$\lambda-6.5$	$\lambda$	$\lambda+6.5$	nm	2
Transmitter Dispersion Penalty(1270-1330)	$TDP_1$			1	dB	
Transmitter Dispersion Penalty(1350-1370)	$TDP_2$			2	dB	
Transmitter Dispersion Penalty(1390-1490)	$TDP_3$			3	dB	
Transmitter Dispersion Penalty(1510-1570)	$TDP_4$			4	dB	
Transmitter Dispersion Penalty(1590-1610)	$TDP_5$			5	dB	
Extinction Ratio	ER	3.5			dB	
Side Mode Suppression Ratio	SMSR	30			dB	
Relative Intensity Noise	RIN			-128	dB/Hz	
Launch Power of OFF Transmitter	$P_{OUT\_OFF}$			-30	dBm	1

### Notes:

1. Average
2.  $\lambda = 1271, 1291, 1311, 1331, 1351, 1371, 1391, 1411, 1431, 1451, 1471, 1491, 1511, 1531, 1551, 1571, 1591, 1611$

## Optical – Characteristics – Receiver

$V_{CC}=3.14V$  to  $3.46V$ ,  $T_C$

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Optical Center Wavelength	$\lambda_C$	1260		1620	nm	
Receiver Overload	$P_{OL}$	2			dBm	
Receiver Sensitivity @10.3Gb/s	$R_{X\_SEN}$			-14.4	dBm	1
Receiver Reflectance	$TR_{RX}$			-12	dB	
LOS Assert	$LOS_A$	-30			dBm	
LOS De-Assert	$LOS_D$			-17	dBm	
LOS Hysteresis	$LOS_H$	0.5			dB	

### Notes:

1. Average, measured with worst ER:  $BER < 10^{-12}; 2^{31}-1$  PRBS

## Electrical – Characteristics – Transmitter

$V_{CC}=3.14V$  to  $3.46V, T_C$

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Input differential impedance	$R_{IN}$		100		$\Omega$	
Differential data input swing	$V_{IN\_PP}$	180		700	mV	
Transmit Disable Voltage	$V_D$	2		$V_{CC}$	V	
Transmit Enable Voltage	$V_{EN}$	$V_{EE}$		$V_{EE}+0.8$	V	

## Electrical – Characteristics – Receiver

$V_{CC}=3.14V$  to  $3.46V, T_C$

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Differential data output swing	$V_{OUT\_PP}$	300		850	mV	
Data output rise time/fall time (20%-80%)	$t_r / t_f$	28			ps	
LOS Assert	$V_{LOS\_A}$	2		$V_{CC\_HOST}$	V	
LOS De-Assert	$V_{LOS\_D}$	$V_{EE}$		$V_{EE}+0.5$	V	

## A0H Register Description

IIC Addr	Size	Name	Description	Values(HEX)
0	1	Identifier	SFP/SFP+/SFP28	03
1	1	Extended Identifier	Use IIC interface	04
2	1	Connector	Connector Type = LC	07
3-10	8	Transceiver	10G Base LR	20 00 00 00 00 00 00 00
11	1	Encoding	Encoding Type = 64B/66B	06
12	1	BR, Nominal	Nominal Bit Rate 10.3Gb/s	67
13	1	Rate Identifier	Without rate selection function	00
14	1	Length(9μm)-km	Link Length / SMF = 10km	0A
15	1	Length (9μm)-100m	Link Length / SMF = 10km	64
16	1	Length (50μm)-10m	50μm MMF Link Length = N/A	00
17	1	Length (62.5μm)-10m	62.5μm MMF Link Length = N/A	00
18	1	Length (Copper)	Copper Link Length = N/A	00
19	1	Reserved	Reserved	00
20-35	16	Vendor name	MODULETEK	4D 4F 44 55 4C 45 54 45 4B 20 20 20 20 20 20 20
36	1	Transceiver	Reserved	00
37-39	3	Vendor OUI	Without vendor OUI	00 00 00
40-55	16	Vendor PN	Part number in the Ordering Information	Programmed by Factory
56-59	4	Vendor Revision Number	Manufacturer product version number	Programmed by Factory
60-61	2	Wavelength	Laser Wavelength	Programmed by Factory
62	1	Reserved	Reserved	00
63	1	CC_BASE	Checksum of bytes 0-62	Programmed by Factory
64-65	2	Transceiver Options	1.Rx_LOS 2.Tx_FAULT 3.Tx_DIS	00 1A
66	1	BR, max	NA	00
67	1	BR, min	NA	00
68-83	16	Vendor SN	Manufacturer serial number	Programmed by Factory
84-91	8	Date code	Date code	Programmed by Factory
92	1	Monitoring Type	Internal calibration of DOM RxPower measurement using average optical power	68
93	1	Enhanced Options	1.Monitor Alarm and Warning of TxPower and RxPower 2.Tx_DIS Monitor and Control 3.Rx_LOS Monitor 4.Tx_FAULT Monitor	F0
94	1	Compliance	Revision Implemented	08
95	1	CC_EXT	Check sum of bytes 64-94	Programmed by Factory
96-127	32	Vendor Specific	Vendor Specific Area	Programmed by Factory
128-255	128	Vendor Specific	Vendor Specific Area	Programmed by Factory



## Digital Diagnostic Functions

SFP-10G-CWDM-DML-xxxx-10KM-x-G13 supports the 2-wire serial communication protocol as defined in SFF-8472. Digital diagnostic information is accessible over the 2-wire interface at the address 0xA2. Digital diagnostics for SFP-10G-CWDM-DML-xxxx-10KM-x-G13 are internally calibrated by default. The internal micro control unit accesses the device operating parameters in real time, Such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. The module implements the alarm function of the SFF-8472, alerts the user when a particular operating parameter exceeds the factory-set normal range.

## DDM Threshold Information

Parameter	Alarm Threshold		Warning Threshold	
	High Value	Low Value	High Value	Low Value
Temperature (°C)	95 (5F 00)	-50 (CE 00)	90 (5A 00)	-45 (D3 00)
Vcc (V)	3.63 (8D CC)	2.97 (74 04)	3.46 (87 28)	3.13 (7A 44)
Bias (mA)	100 (C3 50)	2 (03 E8)	80 (9C 40)	4 (07 D0)
TxPower (dBm)	8.16 (FF FF)	-1.0 (1F 07)	8.0 (F6 77)	0.0 (27 10)
RxPower (dBm)	4.0 (62 1E)	-16.0 (00 FB)	3.0 (4D F0)	-15.0 (01 3C)

### Notes:

1. According to domestic customer requirements, the temperature thresholds for commercial temperature and industrial temperature are defined as the same value.



real time. The host acquires this information over a 2-wire serial bus. The module dose not enable the suppression function of the receiver.


After the module is powered on, the read value of the security level access registers 7BH ~ 7EH of A2H is replaced with 0x00. After the content of this group of registers is updated, the read value is last wirtten value. The security level 1 password of this module is 0x00001011. The method to enter the security level 1 working state is to convert and write the security level 1 password in the A2H 7BH ~ 7EH registers of the module, namely 0x00, 0x00, 0x10, 0x11. After entering the security level 1 working state, the user can directly write to the contents of the A0H device address and Table 00 and Table 01 of A2H device address. And this version of the module does not support users to modify the security level 1 password.

## Product Weight

Net weight of module : 17.0g/pcs


Net weight of dust cap: 0.95g/pcs

## Dimensions

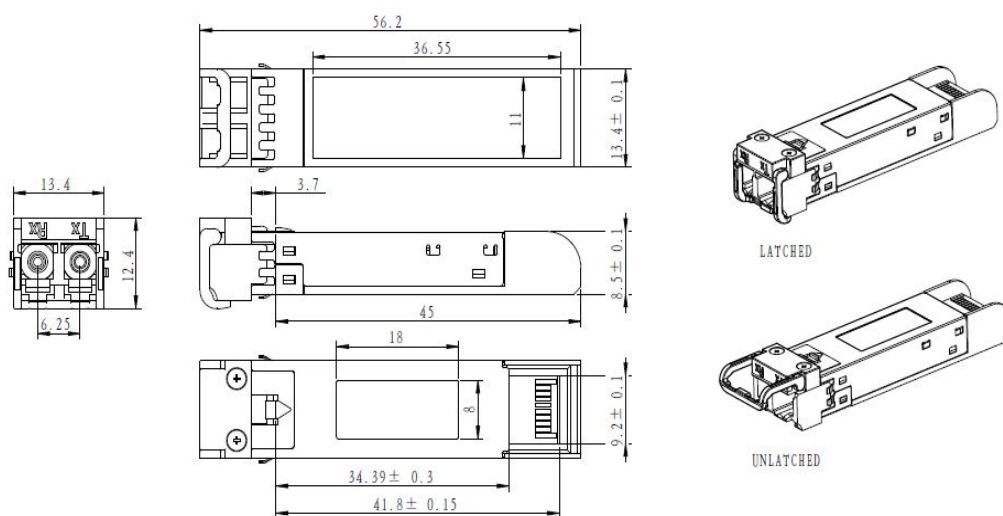


ALL DIMENSIONS ARE ±0.2mm UNLESS OTHERWISE SPECIFIED  
UNIT: mm

## Electrical Pad Layout

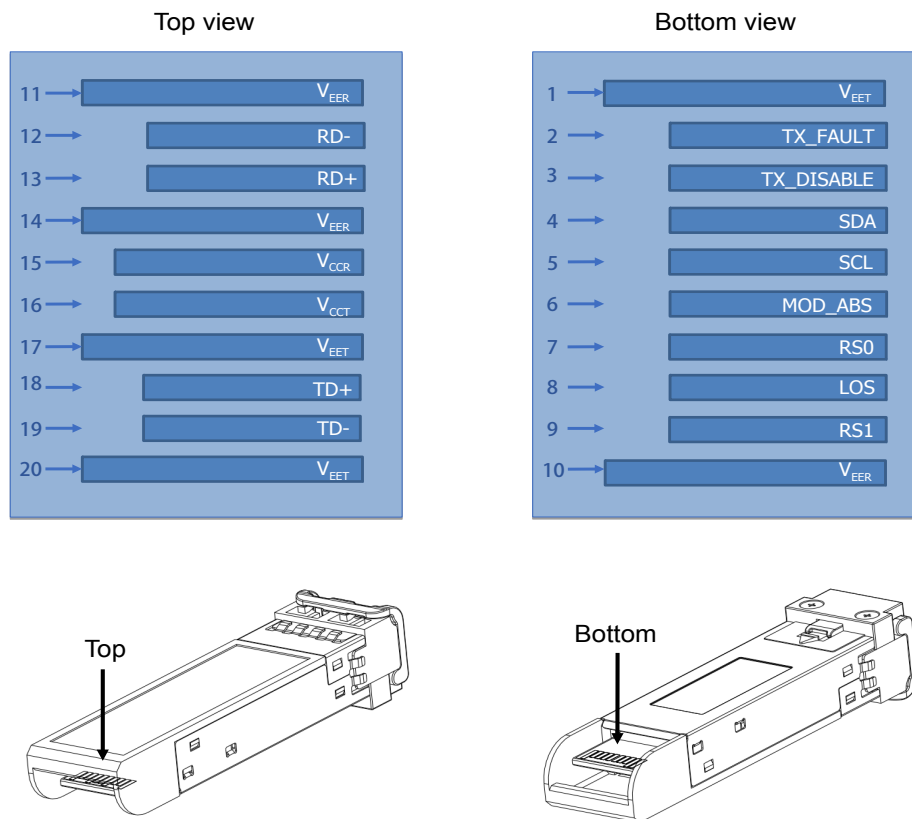

## Typical Eye Diagram

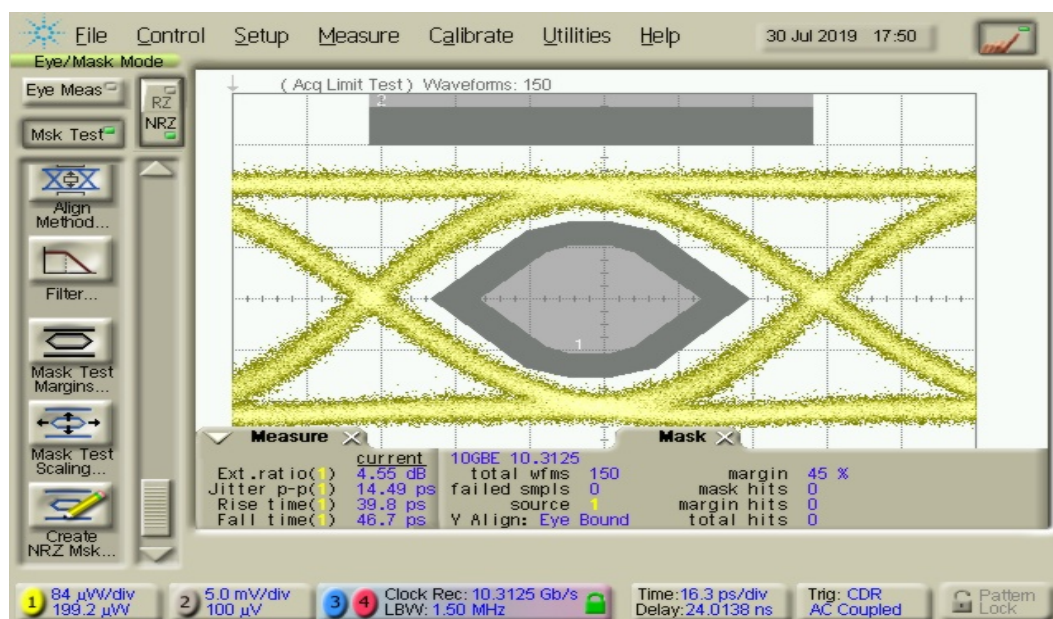

## Pin Assignment

PIN #	Symbol	Description	Remarks
1	V <sub>EET</sub>	Transmitter ground (common with receiver ground)	1
2	TX_FAULT	Transmitter Fault	2
3	TX_DISABLE	Transmitter Disable. Laser output disabled on high or open	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation	5
9	RS1	No connection required	1
10	V <sub>EER</sub>	Receiver ground (common with transmitter ground)	1
11	V <sub>EER</sub>	Receiver ground (common with transmitter ground)	1
12	RD-	Receiver Inverted DATA out. AC coupled	
13	RD+	Receiver Non-inverted DATA out. AC coupled	
14	V <sub>EER</sub>	Receiver ground (common with transmitter ground)	1
15	V <sub>CCR</sub>	Receiver power supply	
16	V <sub>CCT</sub>	Transmitter power supply	
17	V <sub>EET</sub>	Transmitter ground (common with receiver ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC coupled	
19	TD-	Transmitter Inverted DATA in. AC coupled	
20	V <sub>EET</sub>	Transmitter ground (common with receiver ground)	1

### Notes:

1. Circuit ground is isolated from chassis ground
2. TX\_FAULT is the open collector output and should be pulled up with 4.7k–10k ohm on host board to a voltage between 2V and V<sub>cc</sub>+0.3V
3. Disabled: T<sub>DIS</sub>>2V or open, Enabled: T<sub>DIS</sub><0.8V
4. Should be pulled up with 4.7k–10k ohm on host board to a voltage between 2V and V<sub>cc</sub>+0.3V
5. LOS is open collector output and should be pulled up with 4.7k–10k ohm on host board to a voltage between 2V and V<sub>cc</sub>+0.3V, the logic "0" indicates normal operation, and the logic "1" indicates that the receiver signal is lost.

## References

1. IEEE standard 802.3ae. IEEE Standard Department, 2005.
2. Specification for SFP+ 10Gb/s and Low Speed Electrical Interface – SFF-8431.
3. Specification for Diagnostic Monitoring Interface for SFP+ - SFF-8472.